


THREADED CLOSURE PRESSURE VESSELS

FEATURES

- Quick and easy access into vessel without the need for tooling
- From 1 to 10 minutes to open/close, depending on size and pressure rating
- Smooth-form thread and low friction coating helps to drive seal into place with minimal effort and wear
- Sealing elements easy to service and maintain
- Vertical and horizontal orientations with a single closure and blind bore or with dual closures
- Customer specific ports and penetrations
- Ideal for high elevated temperature testing
- Practical for short or long term testing applications
- Available in all material grades
- Vertical and horizontal orientations

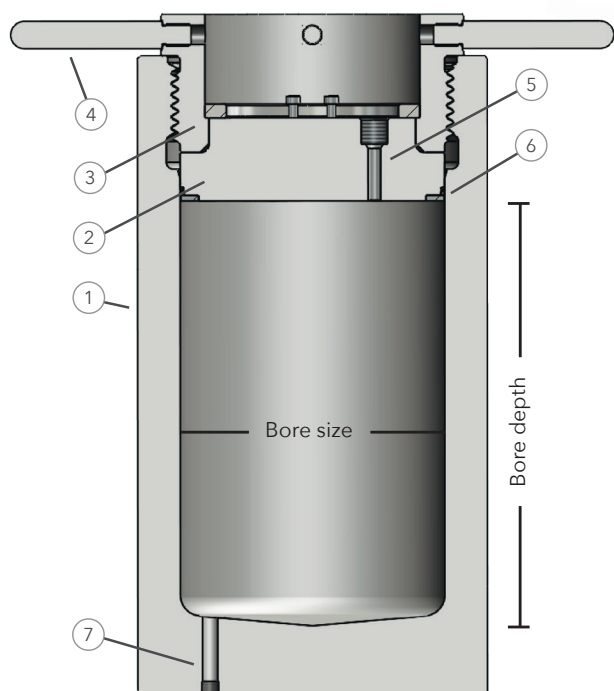

- ① Body ③ Lock Ring ⑤ Feed Through/Tooling Port
② Plug ④ Handle ⑥ Seal ⑦ Fill/Drain Port

PARAMETERS

Pressure	50 bar to 3000 bar
Temperature	-50°C to 250°C
Bore size	Ø25mm to Ø400mm
Bore depth	50mm to 2500mm
Volume	0.05 litre to 250 litre
Ports	Customer specific
Material of Construction	Customer specific

Custom solutions are available to meet specific requirements. Please contact our engineering and technical support who will help you identify the specific options you need.